DS-QAZ0120G1R-S
Network Cabinet Sub Speaker 20W



- Connect to the primary speaker to help boost the volume of sound.
- Support horizontal and vertical installation

▪ Specification

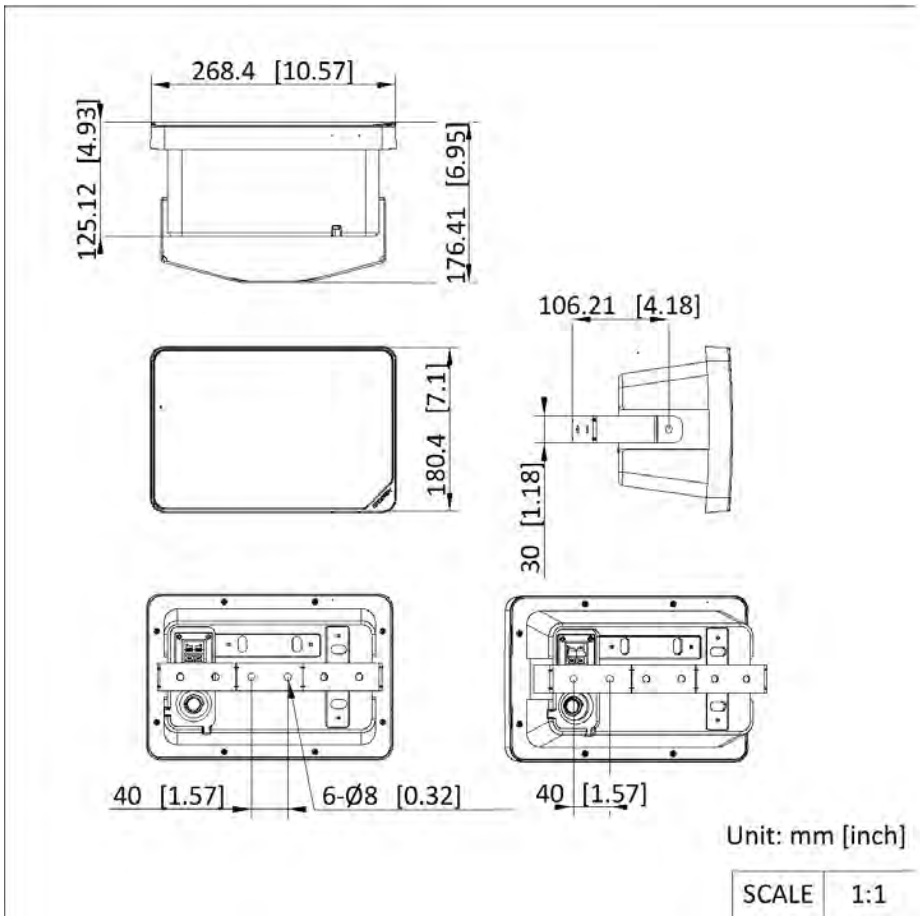
Speaker	
Rated Power	20 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	90 dB
Max. Acoustic Pressure	103 dBSPL
Direction	All directions
Frequency Response	130 Hz to 17.5 kHz
Speaker Unit	5.25'' × 1
Coverage Angle	Horizontal: 135° Vertical: 130°
Interface	
Audio In	Fixed resistance input × 1 , 8 Ω
General	
Material	Main body&Front cover ：plastic, bracket: metal
Operating Temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Operating Humidity	＜90% (No condensation)
Dimension	268.4 mm × 180.4 mm × 125.12 mm (10.57" × 7.1" × 4.93")
Package Dimension	340 mm × 306 mm × 180 mm (13.39" × 12.05" × 7.09")
Weight	Approx. 1.5 kg (3.3 lb.)
With Package Weight	Approx. 2 kg (4.4 lb.)
Color	White
Packing List	Device × 1 U-shaped bracket × 1 Screw pack × 1 Installation sticker × 1 Regulatory Compliance and Safety Information × 1

▪ Available Model

DS-QAZ0120G1R-S

DS-QAZ0120G1R-S/BLACK

▪ Dimension


268.4 [10.57]
125.12 [4.93]
176.41 [6.95]
180.4 [7.1]
106.21 [4.18]
30 [1.18]
40 [1.57]
6-Ø8 [0.32]
40 [1.57]
Unit: mm [inch]
SCALE 1:1

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION